

3.5 DA Pads 1-3.5 inch


1"-3.5" DA backing pads



Item No.	Size	Thread	Velcro	PSA	Max.RPM	Density	Hole	Weight	Foam Thickness
14410-11	1" (25mm)	1/4"-20 Int		✓	20000	Soft	no hole	n/a	10mm
14410-12	1" (25mm)	1/4"-20 Int	✓		20000	Soft	no hole	n/a	10mm
14412-11	1.2" (31mm)	1/4"-20 Int		✓	20000	Soft	no hole	n/a	10mm
14412-12	1.2" (31mm)	1/4"-20 Int	✓		20000	Soft	no hole	n/a	10mm



Item No.	Size	Thread	Velcro	PSA	Max.RPM	Density	Hole	Weight	Thickness
22120-11	2" (50mm)	5/16"-24		✓	20000	Medium	no hole	21g	9mm
22120-12	2" (50mm)	5/16"-24	✓		20000	Medium	no hole	21g	9mm
22120-21	2" (50mm)	M6		✓	20000	Medium	no hole	21g	9mm
22120-22	2" (50mm)	M6	✓		20000	Medium	no hole	21g	9mm
22130-11	3" (74mm)	5/16"-24		✓	20000	Medium	no hole	28g	10mm
22130-12	3" (74mm)	5/16"-24	✓		20000	Medium	no hole	28g	10mm
22130-21	3" (74mm)	M6		✓	20000	Medium	no hole	28g	10mm
22130-22	3" (74mm)	M6	✓		20000	Medium	no hole	28g	10mm

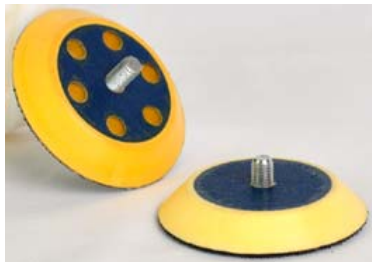

Item No.	Size	Thread	Velcro	PSA	Max.RPM	Density	Hole	Weight	Thickness
22330-021	3" (74mm)	M8 or 5/16"	✓		20000	Medium	no hole	30g	10mm
22330-121	3" (74mm)	5/16"-24	✓		20000	Medium	no hole	30g	10mm
22330-221	3" (74mm)	1/4"-20	✓		20000	Medium	no hole	30g	10mm
22336-121	3" (74mm)	5/16"-24	✓		20000	Medium	6	30g	10mm

* Optional through hole version for M8 or 5/16" bolt



Item No.	Size	Thread	Velcro	PSA	Max.RPM	Density	Hole	Weight	Thickness
26030-1	3" (74mm)	5/16"-24		✓	12000	Soft / Medium	no hole	80g	13mm
26030-2	3" (74mm)	5/16"-24	✓		12000	Soft / Medium	no hole	80g	13mm
26035-1	3.5" (89mm)	5/16"-24		✓	12000	Medium	no hole	85g	13mm
26035-2	3.5" (89mm)	5/16"-24	✓		12000	Medium	no hole	85g	13mm



Item No.	Size	Thread	Velcro	PSA	Max.RPM	Density	Hole	Weight	Thickness
23232-1	3" (70mm)	5/16"-24		✓	12000	Soft	no hole	35g	20mm
23232-2	3" (70mm)	5/16"-24	✓		12000	Soft	no hole	35g	20mm