

3.8 Dust Devil™ V2 DA Pads

Dust Devil™ V2 DA Backing Pads for FESTOOL Sanders

- Patented 2-layer structure and unique interior air flow channel, with side dust absorption feature, improve the cleaning and keep the regional temperature well-distributed in each area of the sanding disc.

- Upper black layer in medium density which is tough, lower white layer in soft density, this structure makes the pad tough enough to withstand aggressive operation, and keep soft interface between sander and workpiece for fine sanding finish.

- With variety of hole configurations, match the vast majority of sanding disc in the market.


- The smart mounting system offers 5/16"-24 bolt to match conventional air sander, M8 with adaptor to match Festool Sander.



Item No.	Size	Thread	Velcro	PSA	Max.RPM	Density	Hole	Weight	Thickness
21960-022	6" (148mm)	M8 and 5/16"	✓		12000	Medium	8+6+1	130g	14mm
21961-022	6" (148mm)	M8 and 5/16"	✓		12000	Medium	6+1	130g	14mm
21962-022	6" (148mm)	M8 and 5/16"	✓		12000	Medium	8+1 (Festo)	130g	14mm
21963-022	6" (148mm)	M8 and 5/16"	✓		12000	Medium	8+6+6+1	130g	14mm
21964-022	6" (148mm)	M8 and 5/16"	✓		12000	Medium	8+1(C=65)	130g	14mm
21965-022	6" (148mm)	M8 and 5/16"	✓		12000	Medium	53	130g	14mm
21966-022	6" (148mm)	M8 and 5/16"	✓		12000	Medium	8+6-8+1	130g	14mm
21967-022	6" (148mm)	M8 and 5/16"	✓		12000	Medium	Multi-air	130g	14mm


Remark:

- Fixed 5/16"-24 bolt is also available, e.g. 21960-122 for fixed bolt.

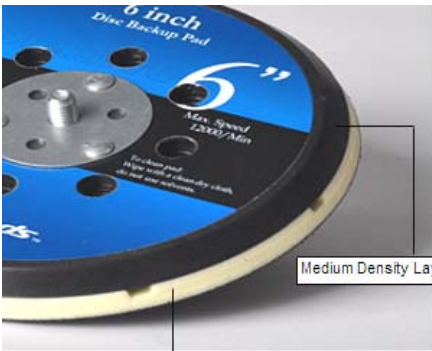

The content of mounting accessories for Dust Devil™ Pads

Changeable 5/16"-24 thread to match the conventional pneumatic sander,
M8 thread to match Festool Sander.

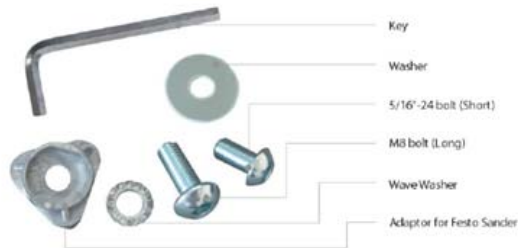

Best Selling Items:

